

PUMP PERFORMANCE CURVES

TYPE: SUBMERSIBLE SLURRY PUMP

MODEL: SVX455R

FREQUENCY: 50Hz

STANDARD SPECIFICATIONS

DISCHARGE BORE

100 mm

HEAD

Max: 17.5 m

Rated: 14 m

CAPACITY

Max: 2.3 m³/min

Rated: 1.08 m³/min

MOTOR OUTPUT

5.5 kW

PHASE x VOLTAGE

3 Øx 380/525 V

CURRENT

11.7/8.5 A

POLES/REVOLUTION

4 P/ S.S.1450 min⁻¹

STARTING METHOD


Direct-on-line start

INSULATION CLASS

F



You'll never work alone!

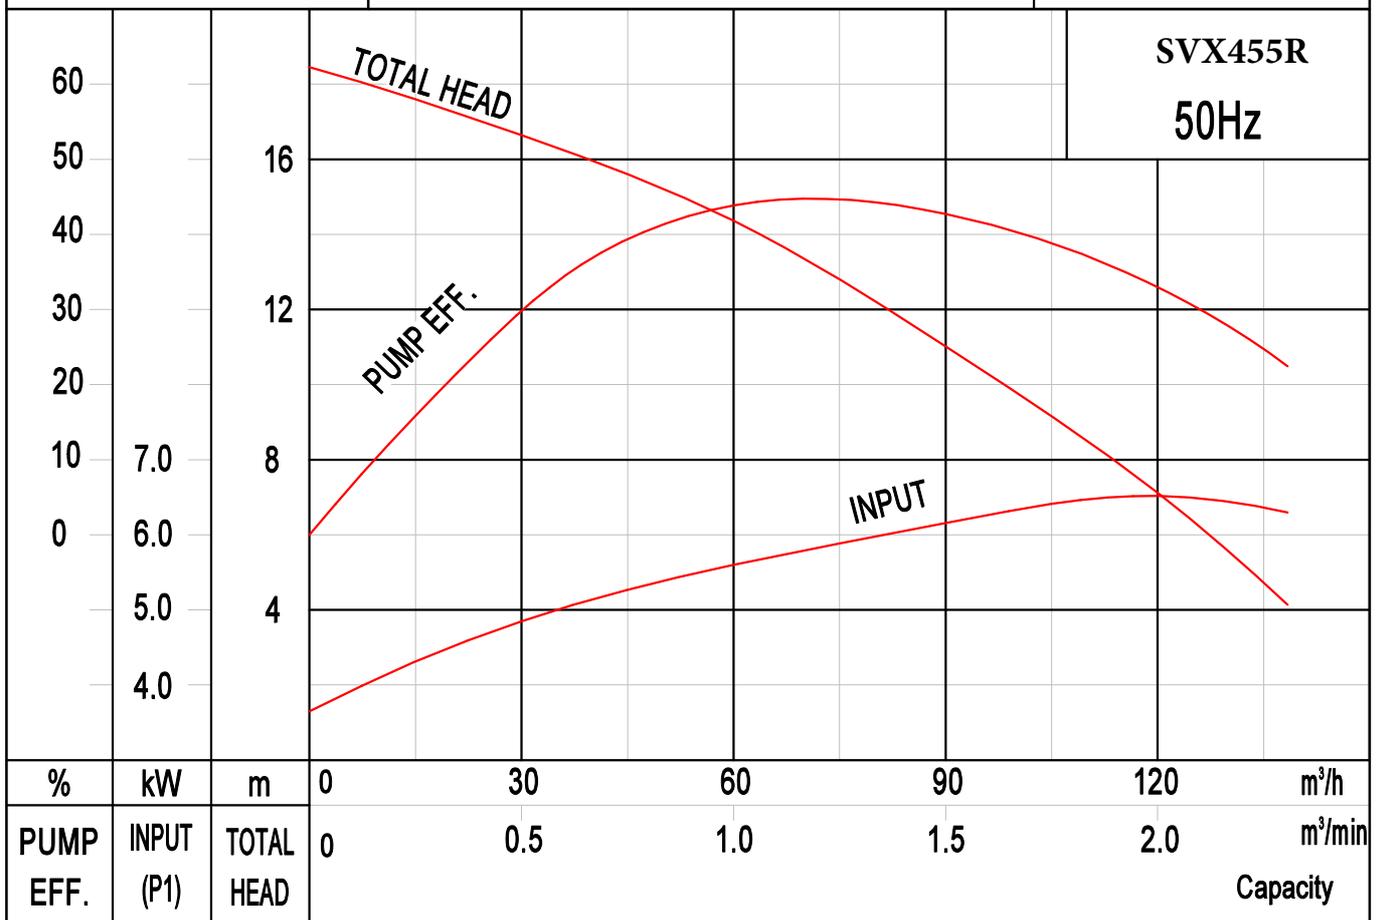

All rights reserved. This file are not allowed to be copied all or partialy without permission.